

# TAPERED H-SHIELD-CG

SLOPED POLYISO INSULATION WITH COATED GLASS FACER



## PRODUCT DESCRIPTION

Tapered H-Shield-CG is a sloped rigid roof insulation panel composed of a closed cell polyisocyanurate foam core bonded on-line to coated glass fiber matt facers (gray). Tapered H-Shield-CG is designed to promote positive drainage and prevent ponding water. For best results, use Hunter Panels Tapered Shop Drawings.

### FEATURES AND BENEFITS


- Manufactured with NexGen Chemistry™ - Zero ODP, CFC Free, EPA Compliant
- Premium facer improves water resistance and dimensional stability.
- Enhanced performance with cold applied BUR, Modified Bitumen and Fully Adhered Single Ply systems.
- Meets FM 4450 and UL 1256 for direct application to metal deck construction.

### PANEL CHARACTERISTICS

- Available in 4'x4' (1220mm x 1220mm) in thickness of 1/2" (12mm) minimum to 4.0" (102mm) maximum in a single layer.
- Available slopes are 1/16"(2mm), 1/8"(3mm), 3/16"(5mm), 1/4"(6mm), 3/8"(10mm) and 1/2"(12mm) per foot
- Available in two grades of compressive strengths per ASTM C1289-06, Type II, Class 2, Grade 2 (20 psi), Grade 3 (25 psi).
- Other panel sizes and facers are available upon special request.

### APPLICATIONS

- Constructions requiring FM Class 1 and UL Class A ratings
- Single-Ply Roof Systems (Ballasted, Mechanically Attached, Fully Adhered)
- Modified Bitumen Systems
- Built-Up Roofing: Asphalt and Coal Tar

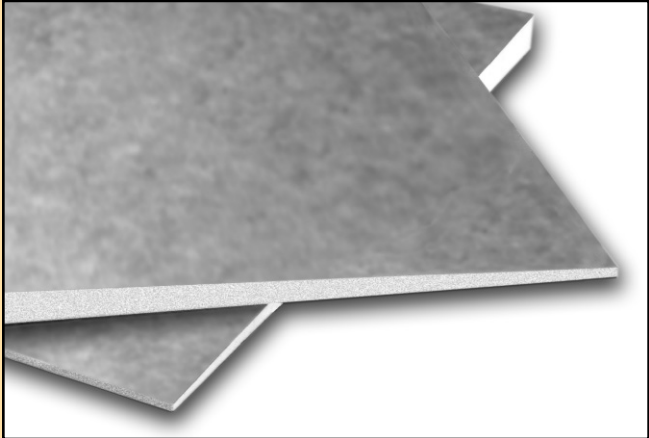

## INSTALLATIONS

### BUILT UP, COAL TAR AND MODIFIED BITUMEN SYSTEMS

Each Tapered H-Shield-CG panel must be secured to the roof deck with Factory Mutual approved fasteners and plates (appropriate to the deck type). Maximum 4'x4' (1220mm x 1220mm) panels of Tapered H-Shield-CG may be adhered to a prepared concrete deck with a Hunter approved adhesive. Application by cold adhesion also approved. Butt edges and stagger joints of adjacent panels. Install the roof covering according to the manufacturer's specifications.

### SINGLE PLY SYSTEMS

#### BALLASTED SINGLE PLY

Each Tapered H-Shield-CG panel is loosely laid on the roof deck. Butt edges and stagger joints of adjacent panels. Install the roof covering according to the manufacturer's specifications.

#### MECHANICALLY ATTACHED SINGLE PLY SYSTEMS

Each Tapered H-Shield-CG panel must be secured to the roof deck with Factory Mutual approved fasteners and plates (appropriate to the deck type). Butt edges and stagger joints of adjacent panels. Install the roof covering according to the manufacturer's specifications.


#### FULLY ADHERED SINGLE PLY

Each Tapered H-Shield-CG panel must be secured to the roof deck with Factory Mutual approved fasteners and plates (appropriate to the deck type). Maximum 4'x4'(1220mm x 1220mm) panels of Tapered H-Shield-CG may be adhered to a prepared concrete deck with a full mopping of hot steep asphalt. Application by cold adhesion also approved. Butt edges and stagger joints of adjacent panels. Install the roof covering according to the manufacturer's specifications. Approved adhesives include, but are not limited to, the following:

- FAS 100
- Insta Stik
- Olybond
- Millennium

See FM listing for all other adhesive approvals.

## PROFILES

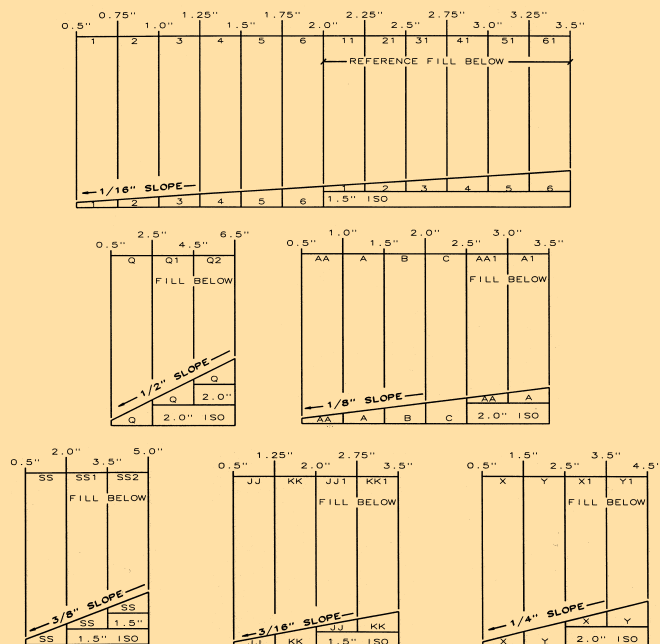

HUNTER ENERGY SMART POLYISO

**TAPERED H-SHIELD-CG  
CODES AND COMPLIANCES**

**FEDERAL SPECIFICATIONS**

- ASTM C1289-06, Type II Class 2, Grade 2 (20 psi), Grade 3 (25 psi)
- National Building Code (1998) Section 2603 Building Officials and Code Administration International, Inc.

**NOTE: Please be aware the Federal Specification HH-I-1972/GEN has been replaced**

**UNDERWRITERS LABORATORIES, INC.**

- Component of Class A Roof Systems (UL 790)
- Hourly Rated P series roof assemblies (UL 263 foam core only) P 225, 230, 232, 259, 508, 510, 514, 519, 701, 713, 717, 718, 719, 720, 722, 723, 724, 727, 728, 729, 730, 732, 734, 735, 739, 801, 814, 815, 818, 819, 823, 824, 826, 827, 828, 832.
- Insulated metal deck assemblies - UL 1256 (nos. 120, 123)
- Tapered H-Shield-CG classified by ULC
- R18846

**FACTORY MUTUAL RESEARCH**

- FM 4450, FM 4470 (Foam Core Only)
- FM Class 1 approval for steel roof deck constructions, Class 1 Fire and 1-60 and 1-90 windstorm classification (FM 4450).  
*(Subject to the conditions of approval described in the current Factory Mutual Approval Guide and Supplements)*

**NEW FLORIDA BUILDING CODE: FL 5968 (OLD #1296)  
MIAMI-DADE COUNTY, FLORIDA NOA NO: 04-1018.01, EXPIRATION: 01-14-10**

**WARNINGS AND LIMITATIONS**

Insulation must be protected from open flame and kept dry at all times. Install only as much insulation as can be covered the same day by completed roof covering material. Hunter Panels will not be responsible for specific building and roof design by others, for deficiencies in construction or workmanship, for dangerous conditions on the job site or for improper storage and handling. Technical specifications shown in this literature are intended to be used as general guidelines only and are subject to change without notice. Call Hunter Panels for more specific details, or refer to PIMA Technical Bulletin No. 109: *Storage & Handling Recommendations for Polyiso Roof Insulation.*



**TYPICAL PHYSICAL PROPERTY DATA CHART  
POLYISO FOAM CORE ONLY**

PROPERTY	TEST METHOD	VALUE
Compressive Strength	ASTM D 1621 ASTM 1289-06	20 psi* minimum (138kPa, Grade 2)
Dimensional Stability	ASTM D 2126	2% linear change (7 days)
Moisture Vapor Transmission	ASTM E 96	< 1 perm ((57.5ng/(Pa*s*m <sup>2</sup> )))
Water Absorption	ASTM C 209	< 1% volume
Flame Spread (foam core)	ASTM E 84	< 50
Smoke Developed	ASTM E 84	<135
Service Temperature		-100° to 250° F (-73°C to 122°C)

\* Also available in 25 psi minimum, Grade 3

**OTHER PRODUCTS BY HUNTER:**

- **H-Shield** FLAT POLYISO
- **H-Shield-NB** POLYISO BONDED TO ORIENTED STRAND BOARD
- **H-Shield-WF** POLYISO BONDED TO WOOD FIBERBOARD
- **H-Shield-F** POLYISO BONDED TO FOIL
- **H-Shield-AGF** POLYISO BONDED TO AGF FACER
- **H-Shield-DD** POLYISO BONDED TO DENSDECK
- **H-Shield-DDP** POLYISO BONDED TO PRIMED DENSDECK
- **H-Shield-DWD** POLYISO BONDED TO COATED GLASS FACER FOR DIRECT TO WOOD DECK APPLICATIONS
- **Tapered H-Shield** TAPERED POLYISO
- **Tapered H-Shield-WF** TAPERED POLYISO BONDED TO WOOD FIBERBOARD
- **Tapered H-Shield-CG** TAPERED POLYISO BONDED TO COATED GLASS FACER
- **Cool-Vent** VENTILATED NAILBASE INSULATION PANEL
- **Cool-Vent II** VENTILATED NAILBASE INSULATION PANEL

H U N T E R

*Energy Smart Polyiso*

888-746-1114

15 FRANKLIN STREET, PORTLAND, ME 04101 • FAX: 877-775-1769

**MANUFACTURING FACILITIES:**

- |                          |                       |
|--------------------------|-----------------------|
| <b>KINGSTON, NY</b>      | <b>TERRELL, TX</b>    |
| <b>FRANKLIN PARK, IL</b> | <b>TOOELE, UT</b>     |
| <b>LAKE CITY, FL</b>     | <b>SMITHFIELD, PA</b> |